



XQD 500


ULWW282150RGBW

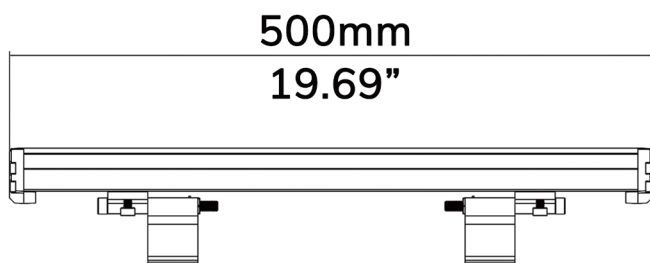

Technical information:

Installation:	Wall
Material:	Aluminium
Finish:	Grey Anodized Aluminium
Treatment:	Anodization
Diffuser type:	Acrylic
Optics:	Linear-light
Lamp type:	LED
Energy performance class:	G
Colour temperature:	RGBW
CRI:	>80
LB Factor	L70B10 - 50.000h
Power consumption (Watt):	6
Lumen:	285
Real Lumen:	318
Power supply:	Remote
LED:	24 V
Insulation class:	⊕ CL.III
Power + signal cable:	0.15m H05RN-F 2x1+3x0.5
Type of protection:	IP 65
Standards and Marks of Conformity:	CE

Double cable entry at the back.



XQD 500

ULWW282150RGBW




XQD 500


ULWW282150RGBW




Lighting Distribution:

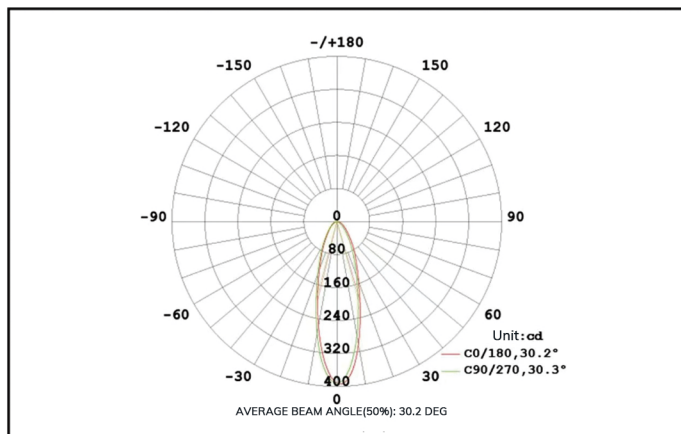


30°

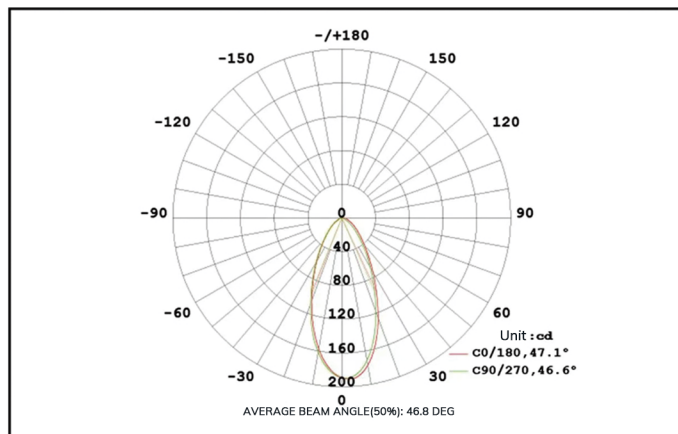

45°

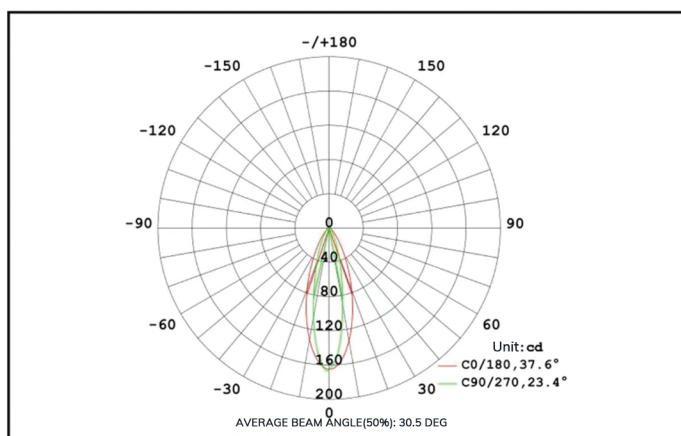

25*40°

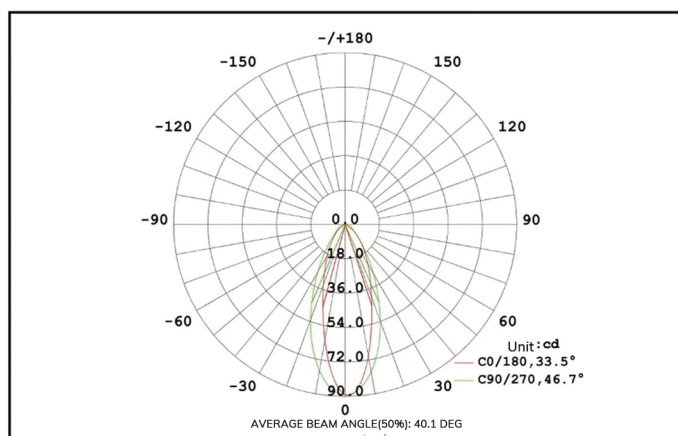

30*50°